

PROFIBUS PA ES Cable for Vibration Resistant Installation LSZH FireFighter®

Cable Design



Wire

Conductor	Stranded bare copper wire 7/0,40mm (18awg)	Ø 1,20 mm
Insulation	Foamed Polyethylene (PE) with skin	Ø 2,55 mm

Core

Pair	2 wires twisted to a pair (RD-GN)	
Tape	Plastic tape overlapped	
Easystrip Jacket	Soft Thermoplastic copolymer	Ø 5,40 mm
Screen	Alulamine foil overlapped	
Braid	Tinned copper wire braid, 90% coverage	Ø 6,10 mm

Outer Jacket	Low Smoke Zero Halogen FireFighter®	Ø 8,0 ± 0,20 mm
---------------------	-------------------------------------	-----------------

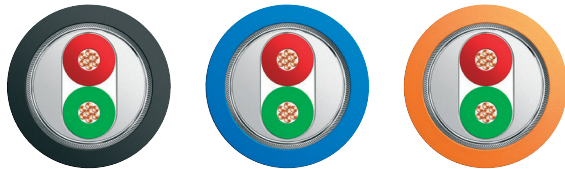

Characteristics

Flame retardant acc. to IEC 60332-1-2,
Halogen free acc. to IEC 60754,
Smoke density acc. to IEC 61034,
UV-resistant

Specification

Part Number	Type
231P1854-1	Black PROFIBUS PA ES cable for Vibration Resistant installation (easy to strip), 2x18AWG7, LSZH FireFighter®
231P1854-2	Blue PROFIBUS PA ES cable for Vibration Resistant installation (easy to strip), 2x18AWG7, LSZH FireFighter®
231P1854-8	Orange PROFIBUS PA ES cable for Vibration Resistant installation (easy to strip), 2x18AWG7, LSZH FireFighter®

Electrical Data @ 20° C

Conductor resistance		≤	22	0hm/km
Screen resistance		≤	9	0hm/km
Insulation resistance		≥	10	M0hm*km
Capacitance (1 kHz)		≈	54	nF/km
Characteristic Impedance	31,25 kHz		100±20	0hm
Attenuation	39 kHz	≤	3	dB/100m
Capacitance unbalance e		≤	2	nF/km
Surface transfer impedance	20 MHz	≤	5	m0hm/m
Rel. Velocity of Propagation		≈	72	%
Operating voltage (peak)		≤	100	V
Test Voltage (wire/wire rms 50Hz 1min.)			1000	V
Test Voltage (wire/screen rms 50Hz 1min.)			800	V

Mechanical & Thermal Characteristics

Temperature range	Transport and fixed installation	-35 ~ +80	°C
	Installation and flexible use	-25 ~ +80	°C
Min. Bending radius allowed	repeated	8	x Ø
	single	4	x Ø
Weight (approx.)		94	kg/km